




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/22	A2	(11) International Publication Number: WO 99/12364 (43) International Publication Date: 11 March 1999 (11.03.99)
<p>(21) International Application Number: PCT/FI98/00675</p> <p>(22) International Filing Date: 31 August 1998 (31.08.98)</p> <p>(30) Priority Data: 973575 1 September 1997 (01.09.97) FI</p> <p>(71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): LUMME, Martti [FI/FI]; Haavikkotie 17, FIN-04260 Kerava (FI). HIPPELÄINEN, Lassi [FI/FI]; Kajanuksenkatu 7 A 11, FIN-00250 Helsinki (FI).</p> <p>(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).</p>	<p>(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>Without international search report and to be republished upon receipt of that report.</i></p>	

(54) Title: **E-MAIL TRAFFIC IN A MOBILE COMMUNICATIONS SYSTEM**

(57) Abstract

The addresses of a mobile station (MS) and a second party (B) connected to the Internet (12) are converted in such a way that a short message service centre (SMSC) receives an allocation request (2-1) from a mobile station for allocating a virtual number (VN) to a combination comprising the address (IA_B) of a second party preferably also a mobile station identifier. The SMSC sends a reply (2-2) to the mobile station, the reply indicating the allocated virtual number (VN). The mobile station (MS) transmits a short message (2-9) to the virtual member. The SMSC forms an Internet address (IA_B) of the second party (B) on the basis of the virtual number (VN) and the allocation request (2-1) and sends to the Internet address an e-mail message (2-10) whose text part corresponds to the text part of the short message. The B party can reply (2-11) by using the reply function of the e-mail, which exchanges the sender for the recipient. The B party can also use (2-13) the ISDN number of the mobile station. In both cases (2-12, 2-14) a virtual number (VN) is sent to the mobile station (MS), the number indicating the sender to the user of the mobile station.

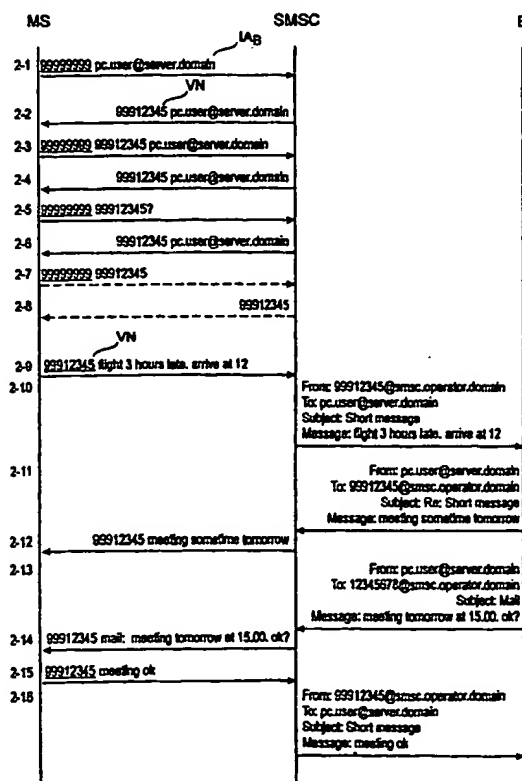

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

E-MAIL TRAFFIC IN A MOBILE COMMUNICATIONS SYSTEM

BACKGROUND ART

The invention relates to transmitting electronic mail (e-mail) between the Internet and a mobile station.

5 The invention is described in connection with a GSM system (or its derivatives, such as a DCS/GSM1800), at first with reference to Figure 1. The user of a mobile station (MS) communicates with a Mobile Switching Centre MSC through a Base Station Subsystem BSS, and with other mobile stations through the MSC, or with terminals of a wired network through a Public
10 Switching Telephone Network PSTN. A Short Message Service Centre SMSC through which text messages, i.e. short messages, can be transmitted and received, is connected to the GSM system.

 The use of Internet in transmitting e-mail is rapidly becoming popular. Figure 1 illustrates an e-mail server 13 connected to the Internet 12, and a
15 personal computer B connected to this server (e.g. through a local area network). (Reference B refers to a second party of a call, i.e. what is known as subscriber B.) A light and easily portable mobile station would in many respects be an ideal terminal for using e-mail.

 A problem is the incompatibility between the short message function
20 of the GSM system and Internet concerning e-mail addresses. As is known, in the GSM system short messages are transmitted using the recipient's ISDN number. The length of a short message is limited to 160 characters. The recipient's ISDN number is not included in these 160 characters. In the Internet the e-mail addresses are of the following format: "user@server.domain". Here
25 the "user" typically stands for a person's first name and surname, the "server" consists of the name of a company or an organization and the "domain" represents the naming domain of servers indicating the type of organization (for example ".com", ".org" etc) or the country ID (for example ".fi", ".de", etc). In Figure 1 such Internet addresses are for instance the address of the short message service centre SMSC IA_{SMSC} "smc.operator.domain", the address of the
30 e-mail server 13 "server.domain" and computer B in its domain and having the address IA_B "pc.user@server.domain".

 Using Internet addresses in connection with a short message function causes several problems. As prior art methods allow such an address to
35 be transmitted only as a part of the short message contents, this would use the maximum length of the short message (as much as tens of characters),

which in all is 160 characters. In addition, the input of long user IDs and special characters (such as @) from a mobile station keyboard is known to be difficult. Furthermore, the address books, or address lists, of current mobile stations are not designed to store Internet-formatted e-mail addresses. A further
5 problem is that the user of computer B cannot use the reply function of the e-mail program, as the identifier of the mobile station MS and the Internet address of computer B are incompatible.

BRIEF DESCRIPTION OF THE INVENTION

An intermediate object of the invention is to create a method and an
10 equipment for implementing the method of converting the addresses between the short message function of a mobile communication system and the Internet. The intermediate object is achieved with a method and a system which are characterized in what is disclosed in the independent claims. A main object of the invention and preferred embodiments of the intermediate object are
15 achieved with the methods and systems that are disclosed in the dependent claims.

The idea of the invention is that a virtual number is reserved for the Internet-format e-mail address. It is called a virtual subscriber number (a virtual number VN for short), as it is not directly associated with a physical subscriber
20 or a terminal. The virtual subscriber number is converted into an Internet address in the fixed part of the mobile communication system, most conveniently in the short message service centre.

It is highly preferable that the virtual numbers are allocated to combinations comprising both the ID of the mobile station (MSISDN) and the Internet address of subscriber B. It is thus possible to use the same virtual numbers for different mobile stations, a few characters sufficing as the length of an individual virtual number. If the length of a virtual number is three digits, each mobile station can have 1000 such combinations at its disposal. Three digits (and a possible space or another separator in the mobile terminating messages) do not take up much of the maximum length of the short message. If
30 several mobile stations use the same virtual number, the right recipient can in any case be deduced, as two identical combinations cannot exist. Another advantage of this kind of combinations is that they help verifying the ID of the sender of the message. An unauthorized person cannot exploit a virtual number possibly known to him.
35

The invention provides a flexible mechanism for creating addresses .

between the short message function of a mobile communication system and the Internet. A mechanism as described in the invention takes up only a very small part of the maximum length of a mobile terminating short message, i.e. the number of characters equalling the length of the virtual number. An addressing mechanism of the invention does not take up any of the length of a mobile originating short message. Furthermore, the addressing mechanism of the invention is fully compatible with current mobile stations and their address books.

BRIEF DESCRIPTION OF THE DRAWINGS

10 In the following, the invention will be described in greater detail in connection with the preferred embodiments and with reference to the accompanying drawings, in which

Figure 1 shows a diagram of telecommunication system and tables included in a short message service centre of the invention; and

15 Figure 2 and 3 show e-mail transmission in accordance with the invention between a mobile station and a B party.

DETAILED DESCRIPTION OF THE INVENTION

Referring to Figures 1 and 2, the examples and the Figures assume that the subscriber number of a mobile station MS is "12345678", the Internet address IA_B of the B party is "pc.user @server.domain", the virtual number VN allocated to this combination is "99912345", and the Internet address IA_{SMSC} of the short message service centre SMSC is "smc.operator.domain" and its command port is "99999999". The short message service centre SMSC and the server 13 of subscriber B may naturally be in different domains (i.e. their domain names may be different). In Figures 2 and 3, the underlined numbers (99999999 and 99912345) function as short message addresses, and are not part of the short message proper (they do not consume its maximum net length).

Furthermore, for the sake of simplicity and clarity, it is assumed in the following examples that the functionality of the invention is integrated into the short message service centre SMSC of the mobile communications system. Corresponding functions can naturally be implemented in one or several separate network elements that are functionally connected to the short message service centre. Such a supplementary network element can be more advantageous if the network comprises a short message service centre previ-

ously supplied by one provider, and the intention is to add additional features supplied by another provider. In this case a short message service centre signifies the particular combination formed by the actual short message service centre and the changes of the invention associated with the separate network elements.

Steps 2-1 to 2-8 show how the address book can be managed. Table 14 for linking the ISDN number of the mobile station MS, the virtual number VN and the Internet address of the second party is associated with the short message service centre SMSC. Reference 14₁ illustrates one such combination. In step 2-1 the mobile station MS requests the short message service centre SMSC to allocate a virtual number for the Internet address of the B party. The allocation request is a short message transmitted to the port of the short message service centre SMSC (to number 99999999). This short message comprises the Internet address IA_B of the B party (here pc.user@server.domain). In step 2-2 the short message service centre SMSC allocates a virtual number VN (here 99912345) to the pair formed by B and the mobile station MS, and enters the information in table 14 (here on line 14₁). The short message service centre SMSC sends this virtual number VN and (as a precaution) the Internet address IA_B of B (here pc.user@server.domain) to the mobile station. If the short message service centre SMSC is not previously familiar with B's address, it allocates an unused number to B. The mobile station is now able to use the virtual number 99912345 for indicating the B party concerned.

Steps 2-3 and 2-4 show how the user of a mobile station MS can modify the Internet address IA_B associated with a virtual number VN. In step 2-3 the mobile station MS requests the short message service centre SMSC to link the virtual number 99912345 and the Internet address pc.user@server.domain of B. In step 2-4 the short message service centre confirms having done so.

In step 2-5 the mobile station inquires the short message service centre to whom a particular subscriber number has been allocated. In its simplest form the inquiry is a virtual number and a character indicating an inquiry, most preferably a question mark. The short message service centre replies in step 2-6.

In step 2-7 the mobile station asks the short message service centre to delete the Internet address associated with the virtual number

99912345. The simplest way to do this is for an empty Internet address to follow the virtual number. In step 2-8 the short message service centre confirms having done so. This virtual number is then free to be used for other purposes. (In a real situation an address naturally has to be deleted last, which is why the corresponding arrows in Figure 2 have been drawn in dashed lines.)

Steps 2-9 to 2-16 show the actual e-mail traffic so that in the steps 2-9 to 2-12 the mobile station MS transmits a message to which subscriber B replies, and, correspondingly, in the steps 2-13 to 2-16 subscriber B transmits a message to which the mobile station MS replies. In order to illustrate the description, a typical example of the use of e-mail and short messages is described, in which the user of the mobile station MS wishes to inform his secretary (B) that he will be late for a scheduled meeting. The secretary first replies that she will have to reschedule the meeting for the following day. Later the secretary sends a new e-mail message, in which she informs the precise time of the meeting. Finally, the user of the mobile station MS sends a reply to this message.

In step 2-9 the mobile station MS transmits e-mail to subscriber B. This is performed by transmitting a short message whose contents correspond to the contents of an intended e-mail. The short message is transmitted to the virtual number VN (here 99912345) that the short message service centre (in step 2-2) allocated to the pair formed by subscriber B and the mobile station. In step 2-10 the short message service centre SMSC retrieves from table 14 the Internet address of the B party corresponding to the mobile station MS concerned and the virtual number 99912345. It then forms the e-mail message and transmits it to B for example in the following manner. In order to form a sender field ("from") for the e-mail, the virtual number concerned 99912345 is joined to the domain of the Internet address IA_{SMSC} of the short message service centre SMSC, here `smc.operator.domain`. The address thus becomes: `99912345@smc.operator.domain`. The recipient ("to") is the Internet address `pc.user@server.domain` of the B party. The subject of the e-mail message may indicate that a short message is concerned. The contents of the e-mail message will thus be the contents of the short message.

In step 2-11 B replies to the mobile station MS. The reply is initiated by sending an e-mail message to the Internet address of the short message service centre SMSC. As a reply message is concerned, the sender is the same as the recipient in step 2-10 and vice versa. B can thus use the reply

function of the e-mail program. The subject of the message may indicate that the subject concerns a short message. The reply written by subscriber B is the contents of the message. In step 2-12 the short message service centre retrieves from table 14 the number of the mobile station MS (here 12345678) corresponding to the virtual number VN (here 99912345) of the mobile station and to the Internet address of the sender (here pc.user@server.domain). The short message service centre SMSC transmits to this number a short message comprising the virtual number 99912345 and the text part of the e-mail message received in the previous step. By means of the virtual number and the address book, the user of the mobile station MS can, if necessary, deduce who the sender of the message is. If the combined length of the virtual number and the reply message exceeds the maximum length of the short message (160 characters), the excess can be transmitted in a second short message.

In step 2-13 B has organized a meeting for the following day at 15.00 hours and wishes to know if the time is suitable for the user of the mobile station MS. B sends an e-mail message. In this case B does not use the virtual number 99912345 allocated by the short message service centre (as B does not reply to an e-mail but sends a new message and as it is more convenient for B to use the telephone book of the e-mail program for obtaining the mobile station MS number 12345678). The recipient's address is formed by joining the number 12345678 to the domain of the Internet address smsc.operator.domain of the short message service centre SMSC (i.e. keying in 12345678@smsc.operator.domain). The subject field can be "mail". In the message a meeting is proposed for the following day at 15.00 hours and a confirmation is requested. In step 2-14 the short message service centre searches from table 14 the virtual number 99912345 corresponding to the number 12345678 of the mobile station and the Internet address pc.user@server.domain of the sender B. The short message service centre SMSC then forms the short message by joining the virtual number concerned 99912345 with the text part of the e-mail message (received in step 2-13). By means of the virtual number the user of the mobile station MS is able to conclude who the sender is. In steps 2-15 and 2-16 the user of the mobile station MS confirms that the time of the meeting is convenient. Technically these steps correspond to steps 2-9 and 2-10, explained above.

It is assumed in step 2-14 that the virtual number concerned was previously allocated to this sender-recipient pair. If this is not the case, the

short message service centre SMSC is able to allocate an available number. Consequently, the process could also begin with a message subscriber B sends to the mobile station MS. In this case, if the aim is to maximize the information obtained by the user of the mobile station, the short message service centre SMSC sends to the mobile station the e-mail address and the virtual number VN allocated to subscriber B. The short message service centre is able to send this piece of information as a separate short message corresponding to the message 2-2 (or 2-6) described above. Alternatively, the e-mail address of subscriber B and the virtual number VN allocated to subscriber B can be attached to the same e-mail message carrying the actual text part, if their combined length does not exceed the maximum length of a short message. If, in turn, the aim is to minimize message traffic, an extra short message can be avoided by the short message service centre sending only the virtual number VN it has allocated. The message is similar to the message 2-14 explained above, but the virtual number VN (99912345) is new to the user of the mobile station. If the text part of the message does not indicate who the sender is, the user of the mobile station can send an inquiry in a similar way as explained above in connection with message 2-5.

Referring now also to Figure 3, an extended embodiment of the invention is described, in which also the user of a mobile station MS can be identified on the basis of an Internet-format ID (an Internet address). In addition, table 15 which links the ISDN number of the mobile station MS and the Internet address IA_{MS} of the same mobile station, has been associated with the short message service centre SMSC. In step 3-1 the mobile station MS transmits to the command port 99999999 of the short message service centre a short message comprising the number of the mobile station 12345678 and a name selected by its user; "ms.user" in this example. In step 3-2 the short message service centre SMSC stores this information in table 15 and sends a reply confirming that it has linked the number 12345678 and the Internet-formatted name ms.user. A complete Internet address is obtained by keying in the name "ms.user" selected by the user of the mobile station in the domain of the Internet address of the short message service centre, i.e. ms.user@smc.operator.domain. If the name ms.user is reserved for another mobile station, the short message service centre cannot allocate it to this particular mobile station. The short message service centre informs about this for example by sending the old Internet-formatted address of the mobile station

concerned, if such an address exists. If not, the short message service centre can reply by sending the ISDN number 12345678 of the mobile station only.

In steps 3-3 and 3-4 the user of the mobile station MS transmits a message to subscriber B, who sends a reply in step 3-5 and 3-6. As regards
5 the contents, these steps correspond to steps 2-9 to 2-13. However, there is a difference in addressing these messages. Having received a short message in step 3-3, the short message service centre SMSC searches table 15 to find out if an Internet address has been allocated to the transmitting mobile station MS. In this case an address has been allocated, and the short message service centre finds the name ms.user next to the number 12345678 in table 15
10 and uses the Internet address ms.user@smc.operator.domain of the mobile station MS in the sender field ("from") in step 3-4.

In the reverse direction, in steps 3-5 and 3-6, the SMSC again uses table 15 and detects that the ISDN number 12345678 corresponds to the Internet address ms.user@smc.operator.domain. The SMSC then (for the
15 comfort of the user of the mobile station MS) again uses table 14 and detects that on line 14, the virtual number 99912345 corresponds to the sender-recipient pair concerned and attaches this virtual number to the short message. On the basis of the virtual number (and the address book) the user of
20 the mobile station MS is able to deduce the sender of the message.

A conventional short message service centre is able to transmit and receive short messages between a short message service centre and a mobile station through a mobile communication system. The short message service centre in accordance with the invention is further expected to possess the
25 ability:

- to send and receive e-mail messages between the short message service centre and subscriber B through the Internet;
- to identify the allocation request for the virtual number transmitted by the mobile station and comprising the Internet address of subscriber B;
- 30 - to allocate the virtual number VN to subscriber B as indicated by the allocation request and to inform the mobile station about the allocated virtual number;
- to identify a short message transmitted by the mobile station to the virtual number VN concerned, and to send the text part of the short message
35 as e-mail through the Internet to the subscriber B, to whom the virtual number VN in question is allocated.

In this context a 'virtual number' (VN) refers to a number which has not directly been connected to a subscriber. 'Allocation' means that a virtual number is reserved among available numbers and is stored in memory in such a manner that the virtual number in question corresponds to subscriber B as mentioned in the allocation request. It is highly advantageous that the virtual numbers be stored as combinations comprising the ID (MSISDN) of the mobile station, the e-mail address of subscriber B and the virtual number. Consequently, the same virtual numbers can be used for different mobile stations. If several mobile stations use the same virtual number, the correct recipient can in any case be deduced as it is not possible for two similar combinations to exist. Another advantage of such combinations is that they help verifying the ID of the sender of the message. An unauthorized person cannot exploit a virtual number possibly known to him. A third advantage is that the virtual numbers can only be a few characters long.

In accordance with a preferred embodiment of the invention, the combinations further comprise a free-form text field, which may include for example a person's plain-language name. In some systems the e-mail addresses can be only eight characters long, an addition of a plain-language name thus increasing the user-friendliness and reducing the danger of confusion.

For the purpose of an extension explained in connection with Figure 3, the short message service centre is further expected to possess the ability:

- to identify the allocation request (3-1) of a user name (ms.user) transmitted by the mobile station MS;
- to allocate the user name (ms.user) to the mobile station that sent the allocation request and to inform the mobile station about the success or failure of the allocation;
- to send the short message transmitted by the mobile station as an e-mail message to the B party, to whom the virtual number concerned (99912345) is allocated to, in such a manner that the e-mail in question comprises the user name (ms.user) allocated to the mobile station MS concerned in the domain of the Internet address of the short message service centre (i.e.: ms.user@smc.operator.domain);
- to receive and to identify an e-mail message sent to the Internet address allocated to the mobile station and to send its text part as a short message to the mobile station MS concerned, preferably in such a way that the short message comprises the virtual number VN (here 99912345) allo-

cated to the combination of the mobile station MS and the B party.

These changes can be implemented by reasonably simple software changes to a known short message service centre, which is connected to the Internet and which is given the Internet address IA_{SMSC} . The short message service centre is provided with table 14. In the case of mobile originating messages, the Internet address IA_B of subscriber B is retrieved from table 14 on the basis of the ISDN number and the virtual number VN of the mobile station. In the case of mobile terminating messages, the ISDN number of the mobile station is retrieved from table 14 on the basis of the virtual number VN and the Internet address IA_B of subscriber B. All columns of the table thus function as search basis, and it is therefore preferable to index all columns of table 14. Similarly in table 15, retrieval is also performed in both directions, and it is therefore preferable to index both its columns.

Another aspect of the invention shows that the invention provides a network element of a mobile communication system, most appropriately a short message service centre, that has been adapted to support a protocol between a mobile station MS and a second party (B), the protocol comprising:

- an allocation request for a virtual number, transmitted by the mobile station (MS) to allocate the virtual number (99912345) to the combination comprising the ID (12345678) of the mobile station concerned and the ID (pc.user@server.domain) of the second party shown by the allocation request;
- a reply to the allocation request for a virtual number sent to the mobile station (MS) in such a manner that the reply indicates whether the allocation of the virtual number was successful or not, and if it is successful, the allocated virtual number (VN).

For sending messages from a mobile station to B party the protocol comprises:

- a first short message transmitted by the mobile station (MS), having the virtual number VN as its address and comprising a first text part; and
- a first e-mail message, which is responsive to the first short message and which is to be sent to the B party, and whose:
 - - sender field indicates the short message service centre SMSC and at least indirectly the mobile station MS concerned;
 - - recipient field indicates the B party, whose address is determined on the basis of the virtual number (VN), which is the address of the first short message, and the allocation request;

- - text part substantially corresponds to the text part of the first short message.

For replying from B party to the mobile station MS the protocol comprises:

- 5 - a second e-mail message which comprises:
- - a sender field indicating the B party;
 - - a recipient field indicating the short message service centre SMSC and at least indirectly the mobile station MS; and
 - - a second text part; and
- 10 - a second short message, the receiving mobile station MS of which is determined at least indirectly on the basis of the recipient field of the second e-mail message; and which short message substantially comprises said second text part and preferably also the virtual number (VN) allocated to the combination concerned.

15 All messages of said protocol either originate from or terminate at the short message service centre SMSC. In the case shown in Figure 2, the fact that the second e-mail message indirectly indicates the mobile station, means that the recipient field comprises, in addition to the address of the SMSC, either the number of the mobile station (12345678) or the virtual number (99912345) allocated to the combination concerned. For the purpose of

20 the extension described in connection with Figure 3, the protocol further comprises:

- an allocation request 3-1 for an Internet address sent by the mobile station MS for allocating an Internet address IA_{MS} (here: ms.user@smc.operator.domain) to the mobile station concerned; and
- 25 - a reply 3-2 to the allocation request for the Internet address, sent to the mobile station MS, the reply indicating whether the allocation was successful or not.

Further in the case illustrated in Figure 3, the sender field of the first

30 e-mail message 3-4 and the recipient field of the second e-mail message 3-5 comprise the Internet address (ms.user@smc.operator.domain) of the mobile station MS.

To those skilled in the art it is obvious that the basic idea of the invention can be implemented in many different ways. Thus, numeric IP addresses could for example be used instead of Internet addresses. This would

35 be somewhat faster, as a retrieval from a domain name server would no longer

be needed. Remembering IP addresses is, however, difficult, which is why the use of Internet addresses is preferred. A short message service centre in accordance with the invention can be one network element, in which all functions are integrated, or it can be a conventional short message service centre, to
5 which a separate expansion part has been connected. The invention and its embodiments are thus not restricted to the examples above but can be modified within the scope of the claims.

CLAIMS

1. A method of matching the addresses of a first party, namely a mobile station (MS) connected to a mobile communication system (11) supporting a short message function, and a second party (B) connected to the Internet (12), **characterized** in that

- a network element (SMSC) supporting the short message function of the mobile communication system is connected to the Internet (12) and an Internet address (IA_{SMSC}) is given to it; and
- said network element (SMSC) receives an allocation request (2-1, 2-3) for a virtual number from the mobile station (MS) for allocating a virtual number (VN) to a combination (14_i) comprising at least the address (IA_B) of the second party (B) indicated in the allocation request; and
- in response to the allocation request for the virtual number said network element (SMSC) sends a reply (2-2, 2-4) to the mobile station (MS), said reply indicating the allocated virtual number (VN) if the reservation is successful.

2. A method as claimed in claim 1, **characterized** in that in the case of a message transmitted from the mobile station (MS) to the second party (B):

- the mobile station (MS) transmits to said network element (SMSC) a first short message (2-9, 2-15, 3-3), which is addressed to the virtual number (VN) allocated to said combination (14_i) and which comprises a first text part; and

- the first network element (SMSC) forms an Internet address (IA_B) of the second party (B) on the basis of the information included in said virtual number (VN) and said allocation request (2-1, 2-3), and sends to the Internet address of the second party a first e-mail message, the text part of which substantially corresponds to said first text part.

3. A method as claimed in claim 1 or 2, **characterized** in that in the case of a message sent by the second party (B) and terminating in the mobile station (MS):

- the second party (B) sends to said network element (SMSC) a second e-mail message (2-11), the recipient field of which comprises said virtual number (VN), and which e-mail message includes a second text part; and
- the network element (SMSC) forms an identifier for the mobile station (MS) on the basis of the information included in said virtual number (VN)

and in said allocation request (2-1, 2-3), and sends a second short message (2-12) to the mobile station (MS) comprising as much as possible of said second text part.

4. A method as claimed in claim 3, **characterized** in that
5 the text part of said second short message also comprises said virtual number (VN).

5. A method as claimed in claim any one of the previous claims, **characterized** in that in the case of a message sent from the second party (B) to the mobile station (MS) :

10 - the second party (B) sends to said network element (SMSC) a third e-mail message (2-13), the recipient field of which comprises the identifier of the mobile station (MS) concerned and which comprises a third text part; and

- if a virtual number (VN) has been allocated to the combination
15 (14₁) comprising the address of said second party (B), said network element (SMSC) transmits to the mobile station (MS) a third short message (2-14), the text part of which comprises said virtual number (VN) and as much as possible of said third text part.

6. A method as claimed in any one of the previous claims, **characterized** in that said combination (14₁) also comprises an identifier of
20 the mobile station (MS) concerned.

7. A method as claimed in claim 6, **characterized** in that said combination (14₁) also comprises a free-form text field.

8. A method as claimed in any one of the previous claims, **characterized** in that :
25

- the mobile station (MS) sends to the network element an allocation request (3-1) for allocating an Internet address (IA_{MS}) to said mobile station (MS); and

- in response to said allocation request, said network element
30 (SMSC) sends to the mobile station (MS) a reply (3-2), which indicates whether the allocation of the Internet address (IA_{MS}) is successful or unsuccessful; and that

- the sender field of said first e-mail message (3-4) and the recipient field of said second e-mail message (3-5) comprise the Internet address (IA_{MS})
35 allocated to the mobile station (MS) concerned.

9. A network element of a mobile communication system, prefera-

bly a short message service centre (SMSC), which is adapted to support a protocol for sending messages between a mobile station (MS) and a second party (B) through said network element (SMSC), **characterized** in that said network element is connectable to the Internet and that said protocol

5 comprises:

- an allocation request (2-1, 2-3) for a virtual number, transmitted by the mobile station (MS), in order to allocate a virtual number (VN) for a combination (14₁) comprising at least an address (IA_B) of a second party (B) indicated by the allocation request;

10 - a reply (2-2, 2-4) to the allocation request for the virtual number, sent to the mobile station (MS), the reply indicating whether the reservation of the virtual number is successful or unsuccessful, and if it is successful, the virtual number (VN) allocated.

10. A network element as claimed in claim 9, **characterized**
15 in that in order to support message traffic from the mobile station (MS) to the second party (B) the protocol further comprises:

- a first short message (2-9, 2-15) transmitted by the mobile station (MS), having the virtual number (VN) as its address and comprising a first text part; and

20 - a first e-mail message (2-10, 3-4), which is responsive to the first short message and which is to be sent to the second party (B), said first e-mail message comprising:

- a sender field indicating said network element (SMSC) and at least indirectly the mobile station (MS) concerned;

25 - a recipient field indicating said second party (B) the address (IA_B) of which is determined on the basis of the virtual number (VN) that is the address of the first short message (2-9, 2-15) and said allocation request (2-1, 2-3);

30 - a text part substantially corresponding to the text part of the first short message (2-9, 2-15).

11. A network element as claimed in claim 10, **characterized** in that in order to support message traffic from the second party (B) to the mobile station (MS) the protocol further comprises:

- a second e-mail message (2-11, 3-5) comprising:

35 - a sender field indicating the second party (B);

- a recipient field indicating said network element (SMSC) and at

least indirectly the mobile station (MS); and

- - a second text part; and

- a second short message (2-12), the receiving mobile station (MS) of which is determined on the basis of the information included in the recipient field of the second e-mail message (2-11, 3-5) and in said allocation request (2-1, 2-3); said second short message substantially comprising said second text part and preferably also the virtual number (VN) allocated to said combination (14₁).

12. A network element (SMSC) as claimed in claim 10, **characterized** in that the sender field of the first e-mail message (2-10) comprises the virtual number (VN) which is the address of the first short message (2-9).

13. A network element (SMSC) as claimed in claim 11, **characterized** in that the protocol further comprises:

15 - a second allocation request (3-1) transmitted by the mobile station (MS) for allocating an Internet address (IA_{MS}) to said mobile station (MS); and
- a reply (3-2) to the second allocation request, sent to the mobile station (MS), the reply indicating whether the allocation of the Internet address (IA_{MS}) was successful or unsuccessful; and that
20 - the sender field of the first e-mail message (3-4) and the recipient field of the second e-mail message (3-5) comprise the Internet address (IA_{MS}) allocated to said mobile station (MS).

14. A network element (SMSC) as claimed in any one of the claims 9-13, **characterized** in that said combination (14₁) also comprises the identifier of the mobile station (MS) transmitting the allocation request.

15. A network element (SMSC) as claimed in any one of the claims 9-14, **characterized** in that it is an appropriately extended short message service centre.

16. A network element (SMSC) as claimed in any one of the claims 9-14, **characterized** in that it consists of a short message service centre known per se and a separate extension part functionally attached to it.

1/3

Fig. 1


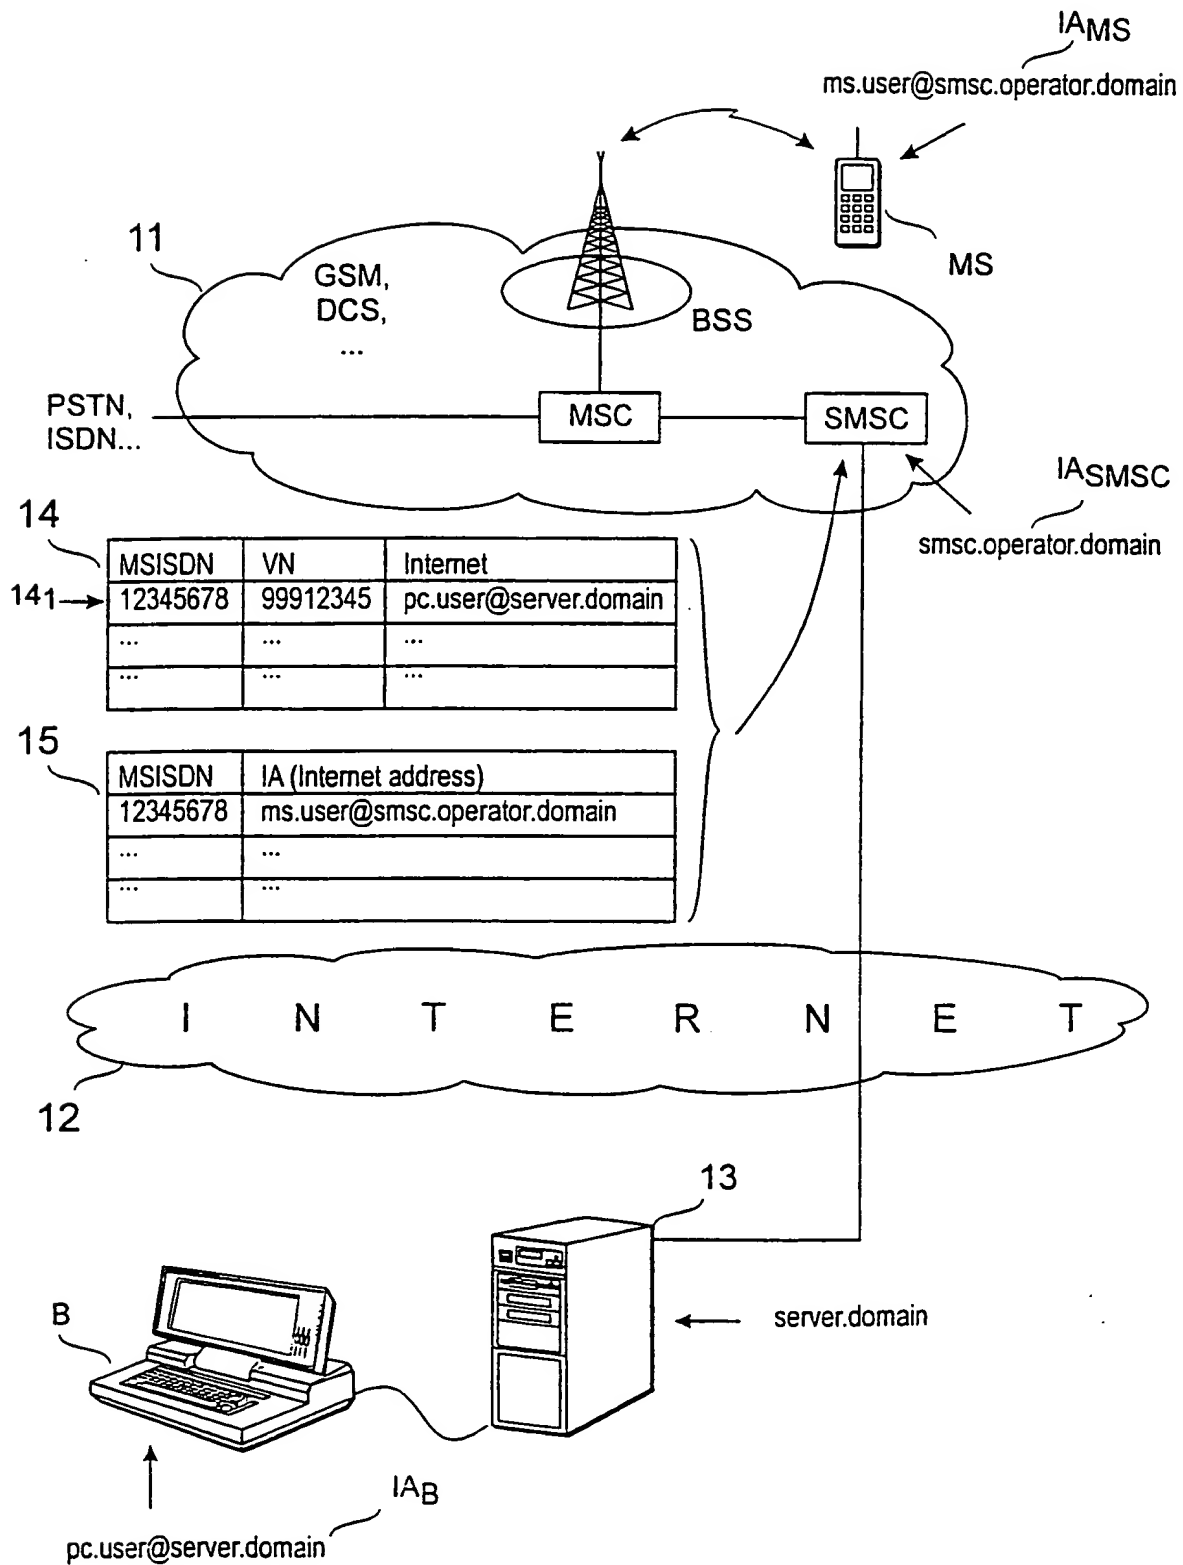


Fig. 2

B

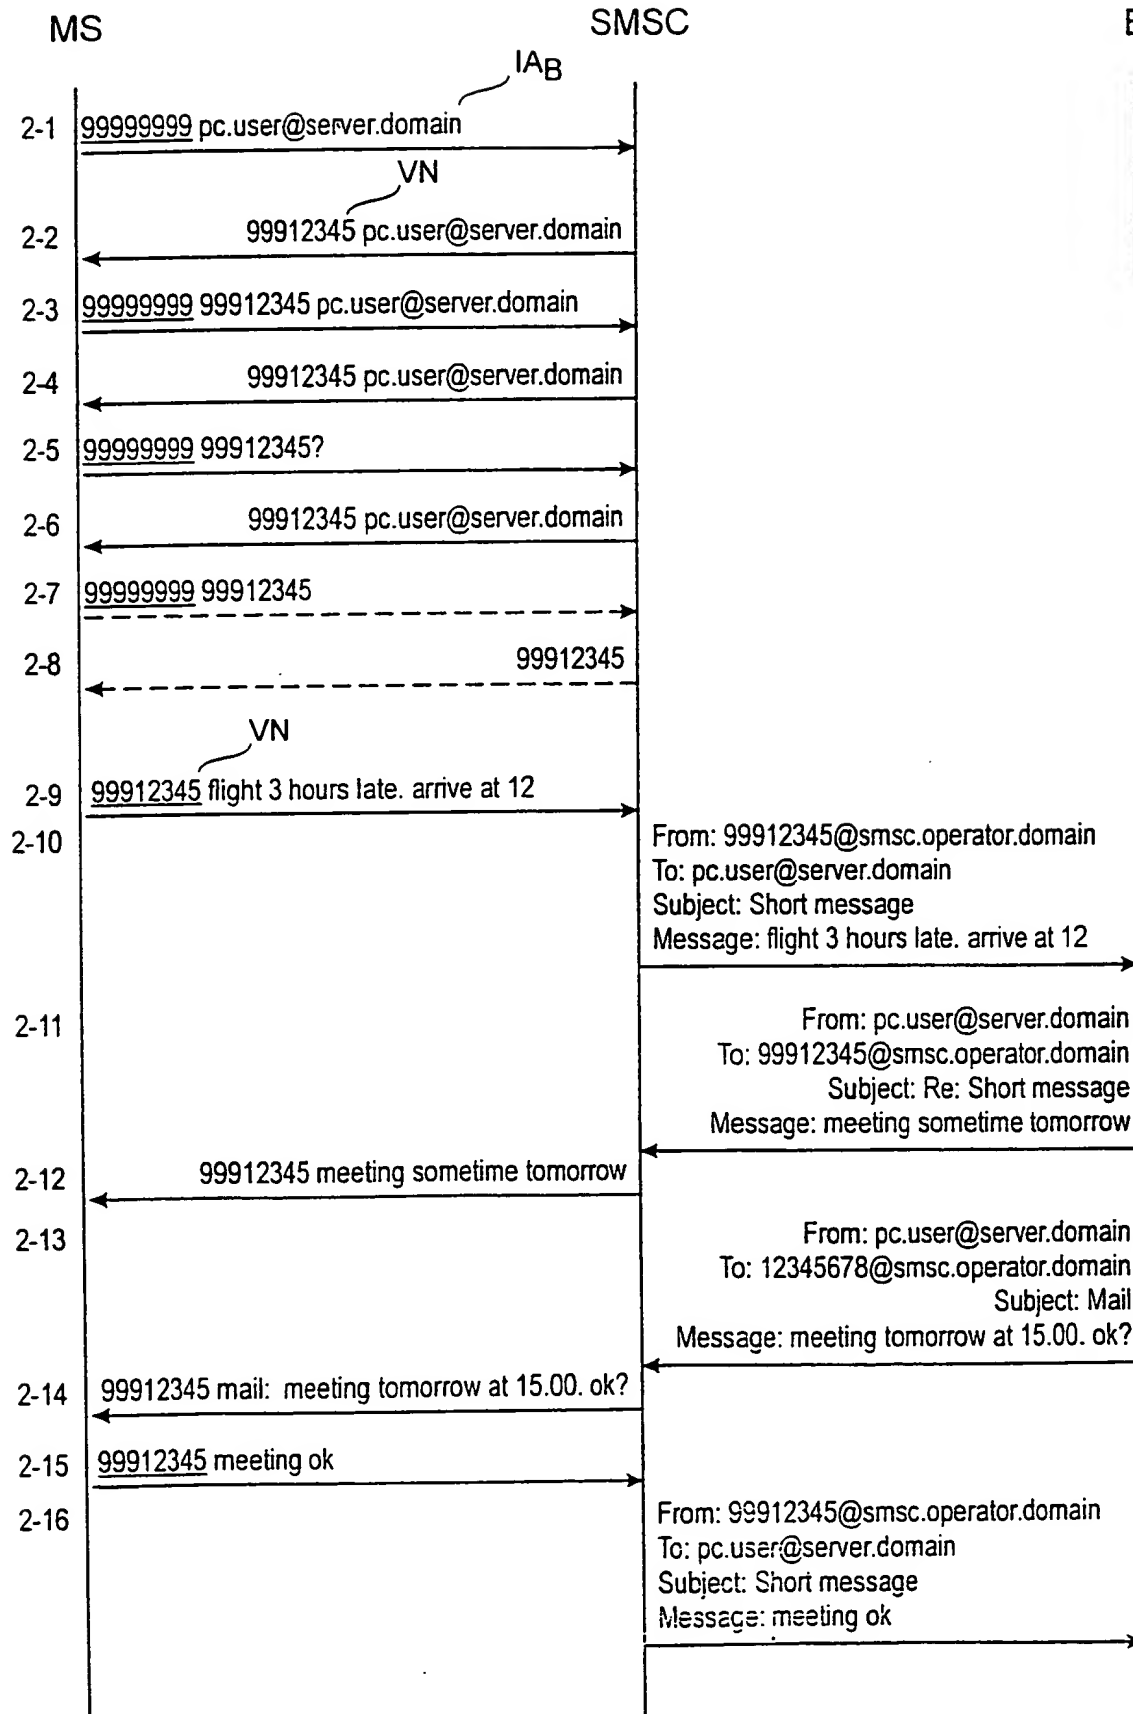

3/3

Fig. 3


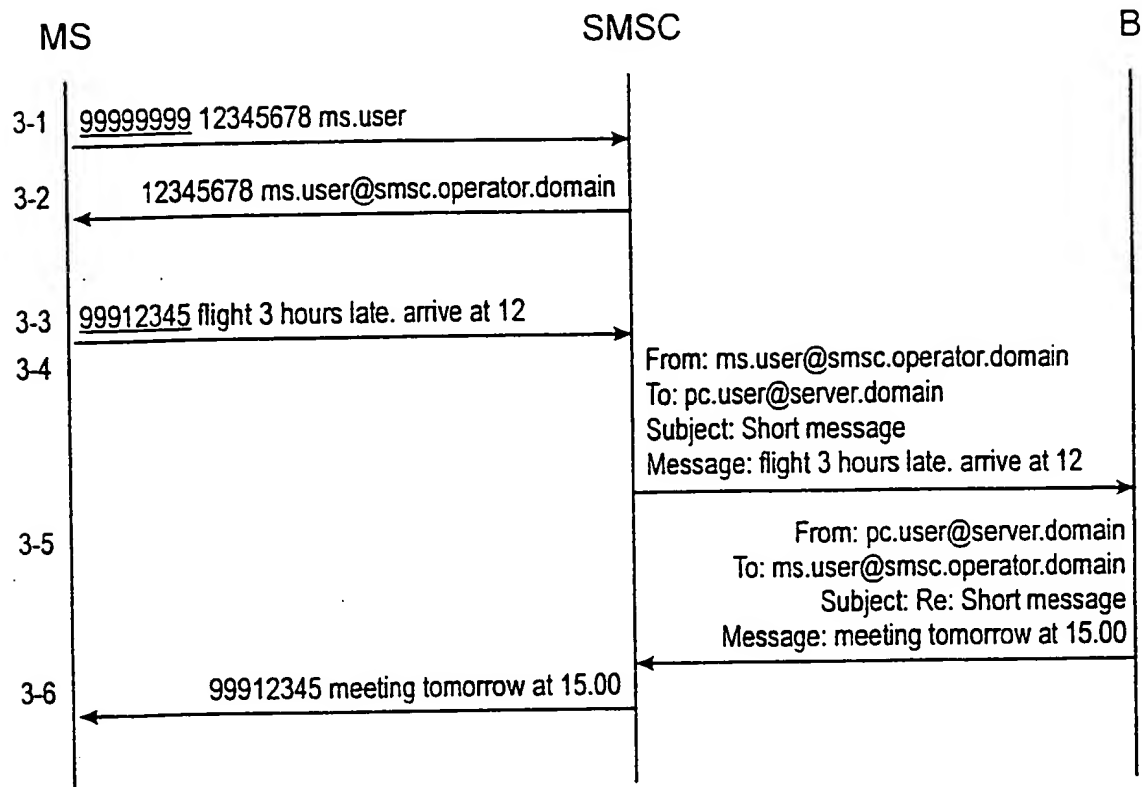



Fig. 1

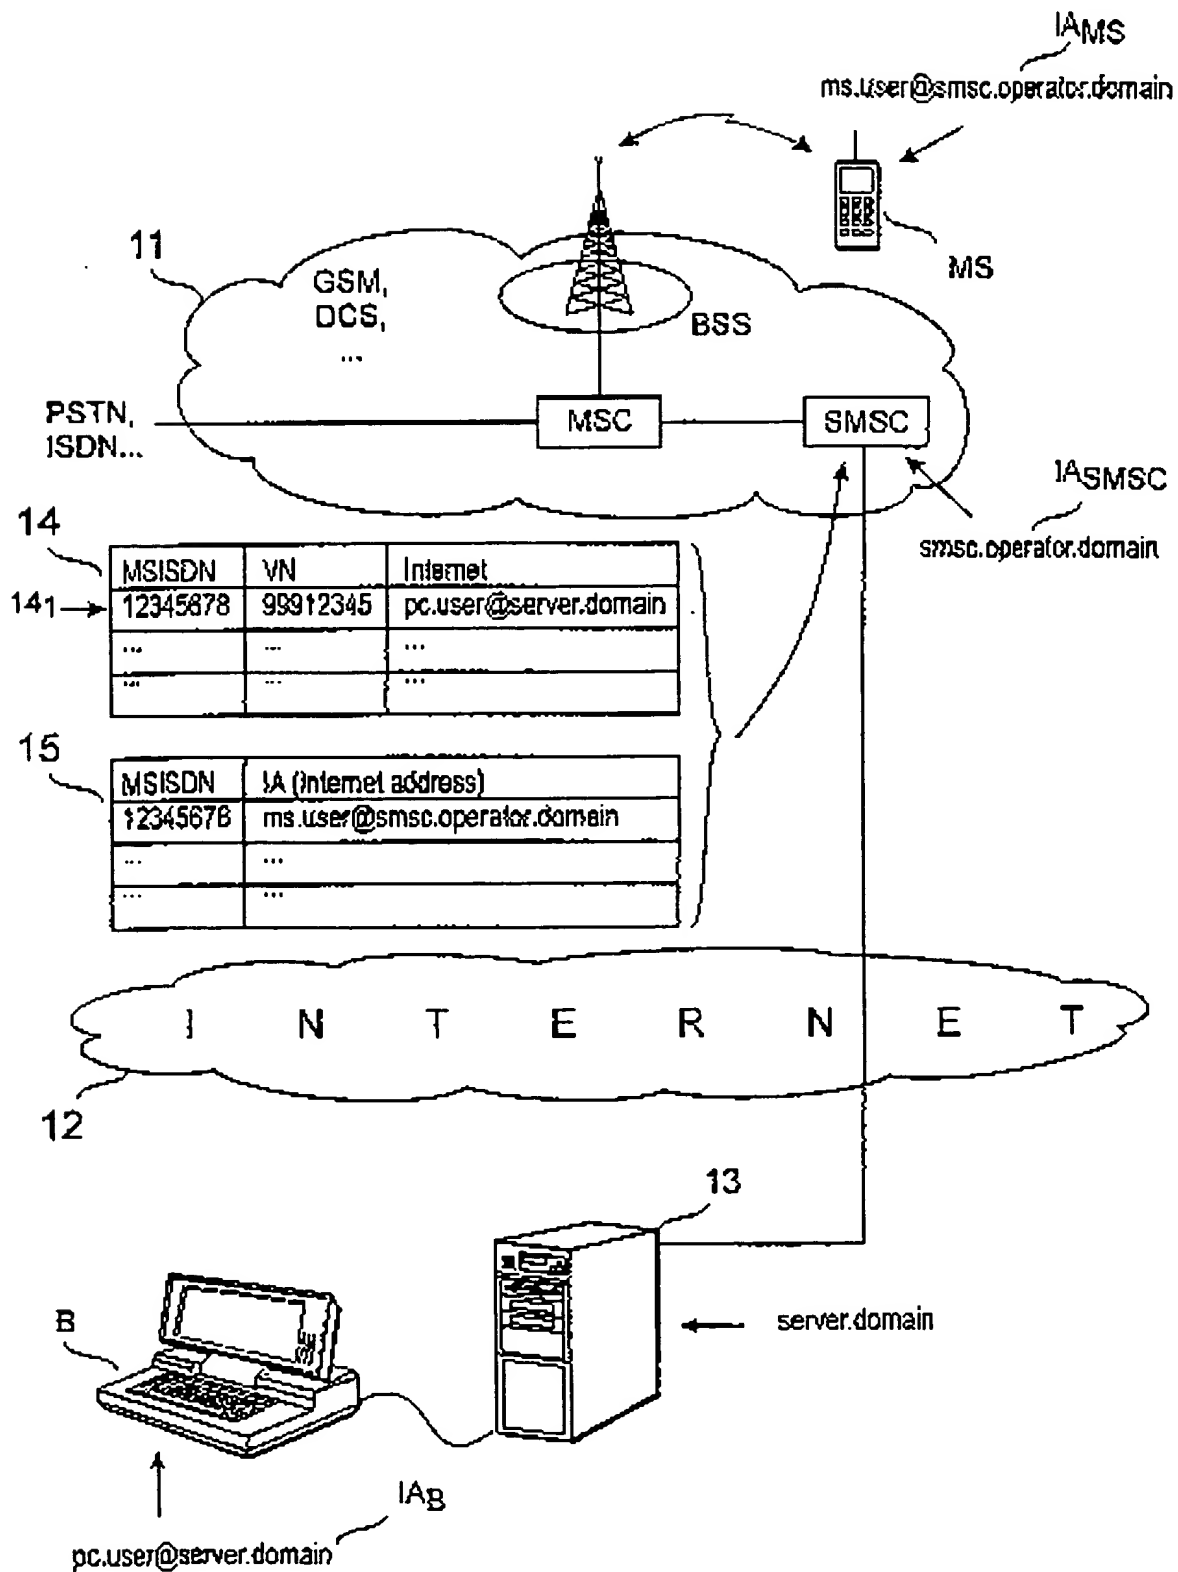

2/3


Fig. 2

B

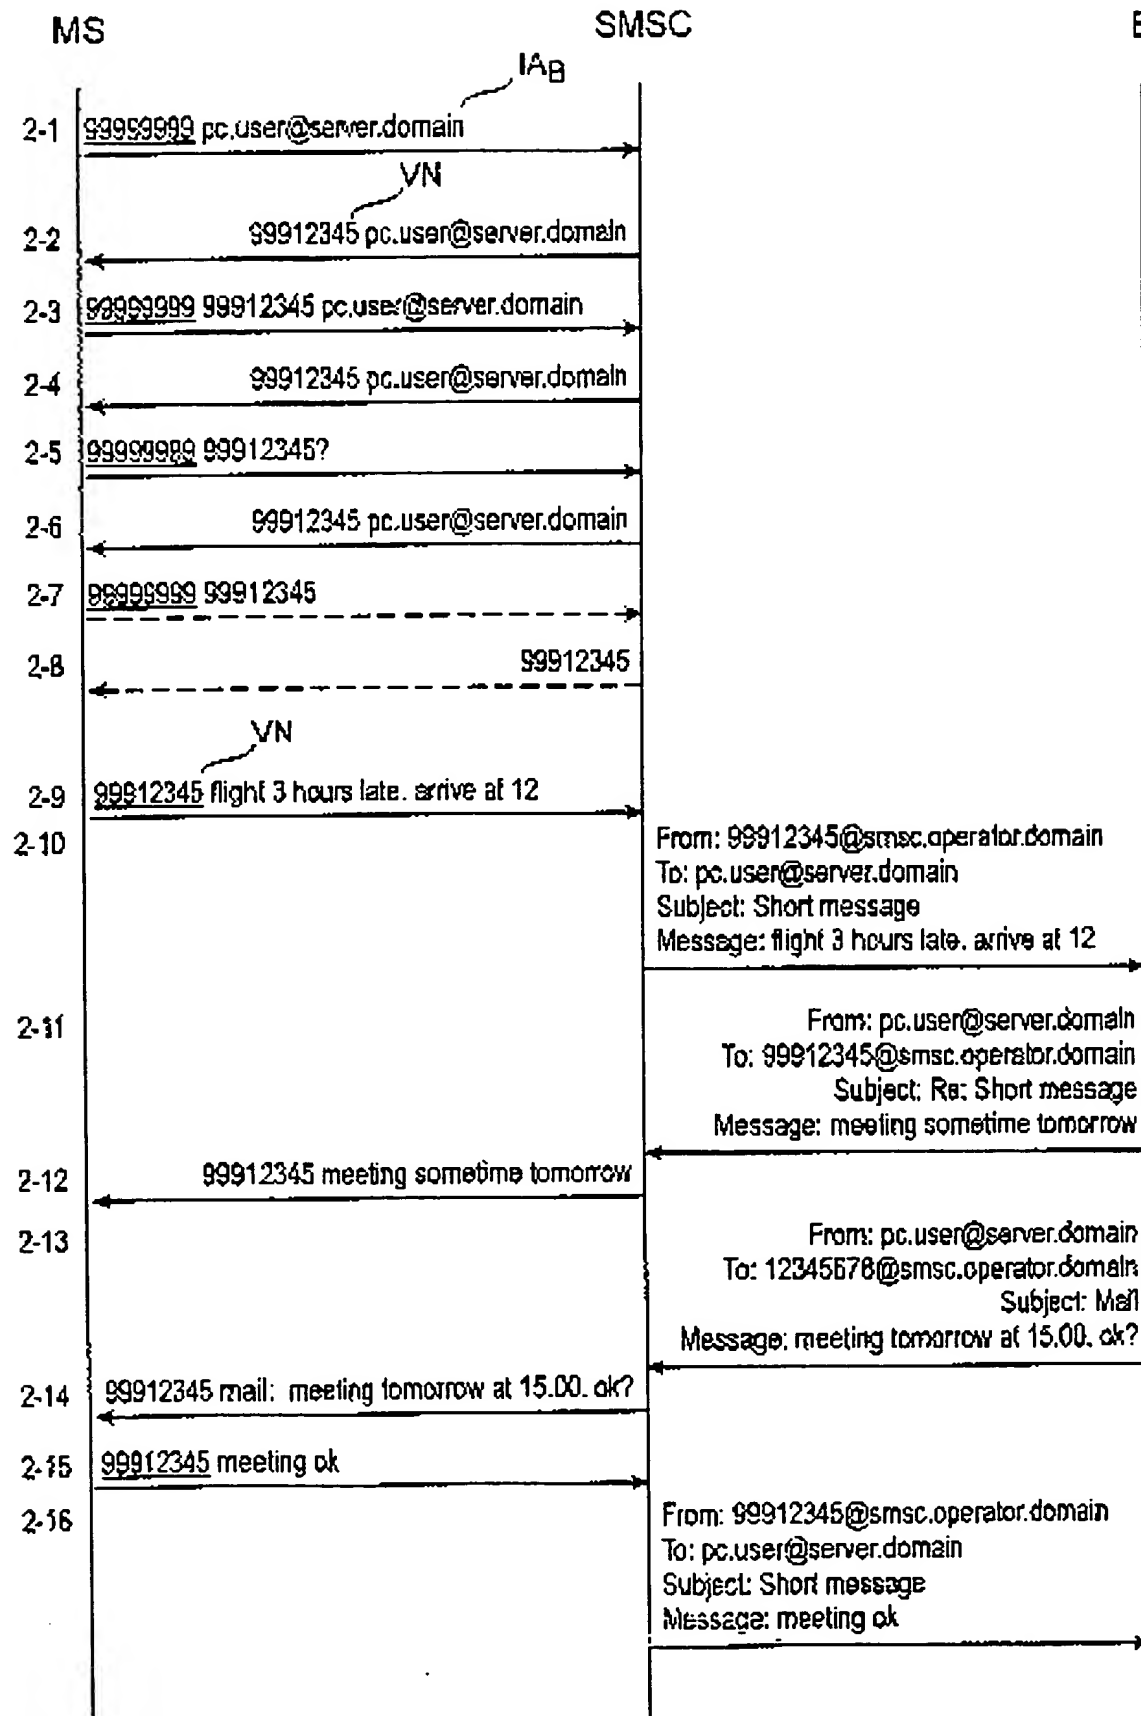

3/3

Fig. 3

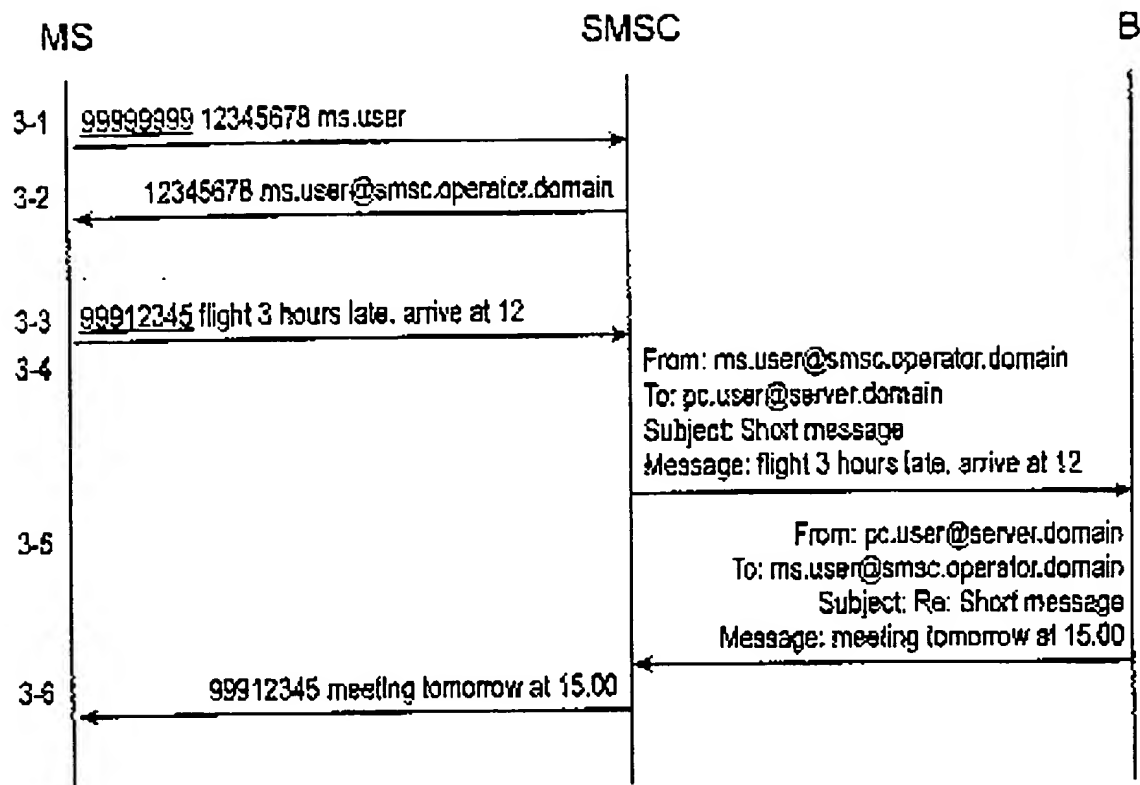



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H04Q 7/22</p>	A3	<p>(11) International Publication Number: WO 99/12364</p> <p>(43) International Publication Date: 11 March 1999 (11.03.99)</p>		
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top; padding: 5px;"> <p>(21) International Application Number: PCT/FI98/00675</p> <p>(22) International Filing Date: 31 August 1998 (31.08.98)</p> <p>(30) Priority Data: 973575 1 September 1997 (01.09.97) FI</p> <p>(71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): LUMME, Martti [FI/FI]; Haavikkotie 17, FIN-04260 Kerava (FI). HIPPELÄINEN, Lassi [FI/FI]; Kajanuksenkatu 7 A 11, FIN-00250 Helsinki (FI).</p> <p>(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).</p> </td> <td style="width: 50%; vertical-align: top; padding: 5px;"> <p>(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p> <p>(88) Date of publication of the international search report: 27 May 1999 (27.05.99)</p> </td> </tr> </table>			<p>(21) International Application Number: PCT/FI98/00675</p> <p>(22) International Filing Date: 31 August 1998 (31.08.98)</p> <p>(30) Priority Data: 973575 1 September 1997 (01.09.97) FI</p> <p>(71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): LUMME, Martti [FI/FI]; Haavikkotie 17, FIN-04260 Kerava (FI). HIPPELÄINEN, Lassi [FI/FI]; Kajanuksenkatu 7 A 11, FIN-00250 Helsinki (FI).</p> <p>(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).</p>	<p>(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p> <p>(88) Date of publication of the international search report: 27 May 1999 (27.05.99)</p>
<p>(21) International Application Number: PCT/FI98/00675</p> <p>(22) International Filing Date: 31 August 1998 (31.08.98)</p> <p>(30) Priority Data: 973575 1 September 1997 (01.09.97) FI</p> <p>(71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): LUMME, Martti [FI/FI]; Haavikkotie 17, FIN-04260 Kerava (FI). HIPPELÄINEN, Lassi [FI/FI]; Kajanuksenkatu 7 A 11, FIN-00250 Helsinki (FI).</p> <p>(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).</p>	<p>(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p> <p>(88) Date of publication of the international search report: 27 May 1999 (27.05.99)</p>			
<p>(54) Title: E-MAIL TRAFFIC IN A MOBILE COMMUNICATIONS SYSTEM</p>				
<p>(57) Abstract</p> <p>The addresses of a mobile station (MS) and a second party (B) connected to the Internet (12) are converted in such a way that a short message service centre (SMSC) receives an allocation request (2-1) from a mobile station for allocating a virtual number (VN) to a combination comprising the address (IA_B) of a second party preferably also a mobile station identifier. The SMSC sends a reply (2-2) to the mobile station, the reply indicating the allocated virtual number (VN). The mobile station (MS) transmits a short message (2-9) to the virtual member. The SMSC forms an Internet address (IA_B) of the second party (B) on the basis of the virtual number (VN) and the allocation request (2-1) and sends to the Internet address an e-mail message (2-10) whose text part corresponds to the text part of the short message. The B party can reply (2-11) by using the reply function of the e-mail, which exchanges the sender for the recipient. The B party can also use (2-13) the ISDN number of the mobile station. In both cases (2-12, 2-14) a virtual number (VN) is sent to the mobile station (MS), the number indicating the sender to the user of the mobile station.</p>				
<pre> sequenceDiagram participant MS participant SMSC participant B Note over MS: 2-1 99999999 pc.user@server.domain MS->>SMSC: 99912345 pc.user@server.domain Note over SMSC: VN SMSC->>MS: 99912345 pc.user@server.domain Note over MS: 2-3 99999999 99912345 pc.user@server.domain MS->>SMSC: 99912345 pc.user@server.domain Note over SMSC: 2-5 99999999 99912345? MS->>SMSC: 99912345 pc.user@server.domain Note over SMSC: 2-7 99999999 99912345 MS->>SMSC: 99912345 Note over SMSC: 2-9 99912345 Right 3 hours late, arrive at 12 SMSC->>B: From: 99912345@smc.operator.domain To: pc.user@server.domain Subject: Short message Message: Right 3 hours late, arrive at 12 Note over B: 2-10 B->>SMSC: From: pc.user@server.domain To: 99912345@smc.operator.domain Subject: Re: Short message Message: meeting sometime tomorrow Note over SMSC: 2-11 SMSC->>MS: 99912345 meeting sometime tomorrow Note over MS: 2-12 MS->>SMSC: From: pc.user@server.domain To: 12345678@smc.operator.domain Subject: Mail Message: meeting tomorrow at 15.00, ok? Note over SMSC: 2-13 SMSC->>MS: 99912345 meeting ok Note over MS: 2-14 MS->>SMSC: From: 99912345@smc.operator.domain To: pc.user@server.domain Subject: Short message Message: meeting ok Note over SMSC: 2-15 </pre>				

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00675

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: H04Q 7/22 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: H04Q, H04L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
WPIL, EDOC		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9708906 A1 (SENDIT AB), 6 March 1997 (06.03.97), claims 1,4,5,7-9,12 --	1-16
X	EP 0777394 A1 (ALCATEL BELL), 4 June 1997 (04.06.97), column 2, line 4 - column 4, line 14; column 16, line 1 - line 11; column 7, line 26 - line 30, column 7, line 45 - line 55 --	1-16
A	WO 9732439 A2 (NOKIA MOBILE PHONES LTD.), 4 Sept 1997 (04.09.97), page 7, line 4 - line 17; page 8, line 16 - line 18; page 9, line 4 - line 5 --	1-16
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
5 March 1999		08 -03- 1999
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Malin Gullstrand Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00675

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9736434 A1 (MARKPORT LIMITED), 2 October 1997 (02.10.97), see the whole document -- -----	1-16

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/02/99

International application No.
PCT/FI 98/00675

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9708906 A1	06/03/97	AU 6894196 A BR 9610197 A CA 2230544 A CN 1199534 A EP 0872128 A IL 123497 D NO 980836 A NZ 316656 A PL 325196 A SE 503752 C SE 9502995 A	19/03/97 11/08/98 06/03/97 18/11/98 21/10/98 00/00/00 29/04/98 28/07/98 06/07/98 26/08/96 26/08/96
EP 0777394 A1	04/06/97	JP 10004432 A	06/01/98
WO 9732439 A2	04/09/97	AU 1881497 A CA 2247449 A EP 0882375 A FI 960895 A	16/09/97 04/09/97 09/12/98 27/08/97
WO 9736434 A1	02/10/97	AU 5286596 A EP 0880863 A	17/10/97 02/12/98